CW195B










Cefiontect Reduce

The Water Flushing

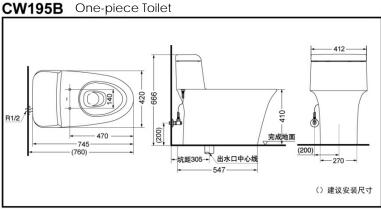

*TOTO(CHINA) CO.,LTD. All rights reserved.

FEATURES

- •3L/4.5L flushing system, low consumption.
- Tornado flushing system makes the best use of water in a strong, clean and quiet way.
- Creative easy-to-clean edgeless bowl.
- · Cefiontect applied.
- Debris, mold and bacteria being prevented from sticking to ceramic surfaces leads to fewer chemicals and water in cleaning.

SPECIFICS

Size: 745*420*666mm

Nominal water consumption:

3.5L

Dual Flush Volume: 3/4.5L

Water efficiency grade: grade

Drainage: floor drain

Flush system: tornado flushing

Rough-in: 305mm Water supply:

0.05MPa(dynamic pressure) ~ 0.75MPa(static pressure)

OTHERS

Series: Camille series Recommend fittings: Lid TC503CVK